
### **Technical Specifications**

#### **HP E23 G4 FHD Monitor**

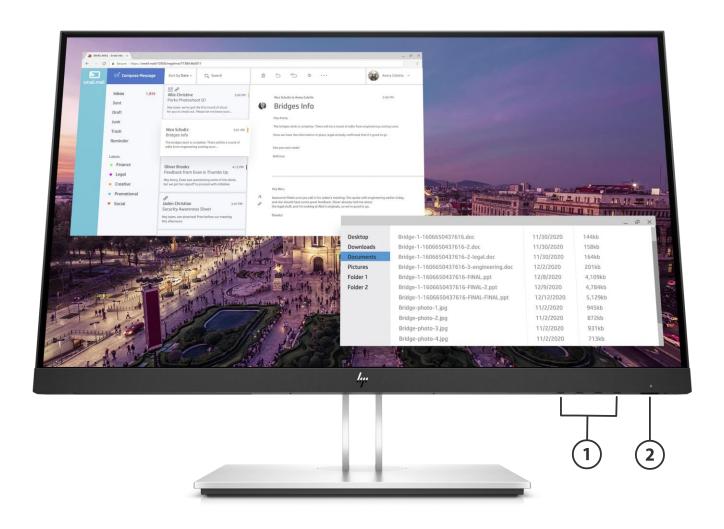


#### **Front**

1. OSD Buttons

2. Power Button

## **Technical Specifications**

### **HP E23 G4 FHD Monitor**

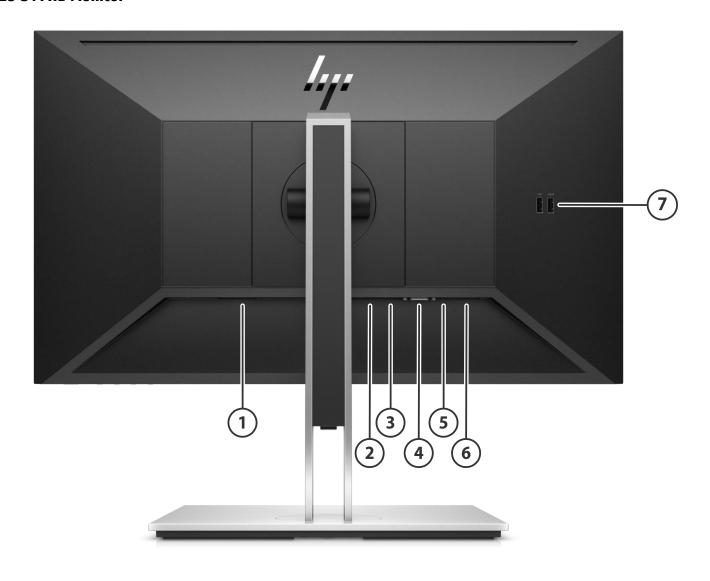

#### **1.** Power Connector

- **2.** DisplayPort™
- 3. HDMI Port
- 4. VGA Port

#### Back

- 5. USB-B Port
- **6.** USB-A Ports (2)
- 7. USB-A Ports (2)



#### **Technical Specifications**

Models: 9VF96AA

Panel SpecificationsDisplay Size (Diagonal)23-inDisplay Panel TypeIPS

Micro-Edge Bezel Yes, 3-sided

Curved Panel N/A

Native Resolution/Timing 1920×1080 @ 60 Hz Panel Bit Depth 8bit (6bit + FRC)

Aspect Ratio 16:9
Brightness - Typical 250 cd/m²
Static Contrast Ratio - Typical 1000:1
Dynamic Contrast Ratio (DCR) 5,000,000:1

Flicker Free Yes

**Pixel Pitch** 0.2652(H)mm x 0.2652(V)mm

Pixels Per Inch (PPI) 96

Backlight Lamp Life (to half brightness 30k minimum

- in hours)

Anti-Glare Panel Yes

**Response Time - Typical** 5ms GtG (with overdrive)

Horizontal Viewing Angle (typical 178°

**CR>10)** 

Vertical Viewing Angle (typical CR>10) 178°

Panel Active Area (w x h)509.18mm x 286.42mmPreset Graphic Modes/Supported640 x 480 @ 60 HzResolutions720 x 400 @ 70 Hz

720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz

Maximum Resolution1920 x 1080 @ 60 HzRecommended Resolution1920 x 1080 @ 60 Hz

Vertical Scan Range50Hz - 60HzHorizontal Scan Range30KHz - 80KHzDefault Color TemperatureNeutral (6500K)Maximum Pixel Clock Speed170MHz

\*VGA or DisplayPort™ 1.2 or HDMI 1.4 required to drive panel at its native resolution

**NOTE:** Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage N

NTSC

72%



#### **Technical Specifications**

**Color Management** Color Space / Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

> **Default Color Temperature** Neutral (6500K)

**Low Blue Light Modes** Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

Black head, Silver stand

certified)

**RGB Channel Adjust** Yes. Gain

**Monitor Specifications Exterior Color of Monitor Bezel and** 

Stand

Plug & Play Yes

Tilt -5° to +23° **Swivel** ±45° **Pivot** ±90° **Height Adjustment Range** 150 mm

**VESA Mounting** 100mm x 100mm

**Security Lock Ready** Yes **Detachable Base** Yes

Warranty Based on region

On Screen Display (OSD)

**On Screen Display User Controls** Brightness+, Color, Image, Input, Power, Menu,

Management, Information, Exit

**User Programmable Modes** 

Yes, 10 **Monitor Control Buttons or Switches** Menu/OK, Minus ("-")/Brightness, Plus ("+")/Color,

Yes, 4

Back/Input, Power

**User-Assignable Function Buttons** 

Languages

10 (English, Spanish, German, French, Italian, Netherlands,

Portuguese, Japanese, T-Chinese and S-Chinese)

**Connector Types** DisplayPort™ 1, DisplayPort™ 1.2

> HDMI 1, HDMI1.4

**VGA** 1 **USB-A** 4 **USB-B** 

**HDCP** support Yes, (DisplayPort™ and HDMI)

**Power & Operating** 

Specs

**Power Supply** Internal

**Power Source** 100 - 240 VAC 50/60 Hz

**Power Consumption - Maximum** 51 W **Energy Saving** 0.5 W **Power Consumption - Typical** 26 W Power cable length 1.9 m

Operational Mode at 100 VAC 12.72 W Operational Mode at 115 VAC 12.75 W Operational Mode at 230 VAC 12.61 W

**EU Energy Efficiency** Class (ERP lot-5)

**Energy Star Data** 

**On-mode Power Consumption** 16 W

**Annual Power Consumption** 24 kWh

#### **Technical Specifications**

Energy Efficiency Class	Ε
-------------------------	---

Operating Conditions Operating Temperature - Celsius 5°-35°C

Operating Temperature - Fahrenheit  $41^{\circ}$  -95°F Non-operating Temperature - Celsius  $-34^{\circ}$  -  $60^{\circ}$ C Non-operating Temperature -  $29^{\circ}$  -  $140^{\circ}$ F

**Fahrenheit** 

**Operating Humidity** 20 – 80% Relative Humidity (non-condensing)

**Non-operating Humidity** 5-95%

 Operating Altitude
 0 - 5,000 m (16,400 ft.)

 Non-operating Altitude
 0 - 12,192 m (40,000 ft.)

Environmental Features and Certifications Mercury-free LED display backlighting

**Arsenic-Free Display Glass** 

Low Halogen\*\*

Yes, Mercury-free LED backlighting

Yes Yes

GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR,

PVC)

NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained

after purchase may not be Low Halogen.

**Agency Approvals and Certifications** CE,CB,KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/

EAC/UL/CSA/PSB/ISC/CCC/CEL/Energy

Star/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New

Zealand MEPS/WEEE Win 10, Win 8, Win 7

Microsoft WHQL CertificationWin 10, Win 8, Win 7ENERGY STAR®Yes, ENERGY STAR® 8

**EPEAT® Registered\*** Yes

CEL Grade 1

TCO Certified Yes

SmartWay Transport Partnership - NA

only

Yes (NA SKU)

**NOTE:** DisplayPort<sup>™</sup> and the DisplayPort<sup>™</sup> logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

**Contains Recycled Plastics** 85% recycled content by total weight

Unit Product/Package Specifications

	<u>Metric</u>	<u>Imperial</u>
Product Dimensions (Unpacked with stand) (W x D x H)	52.16 x 20.7 x 48.98 cm	20.54 x 8.15 x 19.28 in
Product Dimensions (Packed) (W x D x H)	58.1 x 22.3 x 37.2 cm	22.87 x 8.78 x 14.65 in
<b>Display Head Dimensions</b> (Unpacked without stand) (W x D x H)	52.16 x 4.7 x 31.31 cm	20.54 x 1.85 x 12.33in



<sup>\*</sup> Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit http://www.epeat.net for more information.

<sup>\*\*</sup>External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

### **Technical Specifications**

Base Area Footprint (w x d mm)	260 x 207 mm	10.24 x 8.15 in
Bezel Measurements	Bottom 19.49 mm	Bottom 0.77 in
Product Weight (Unpacked with stand)	5.4 kg	11.9 lb
Product Weight (Packed)	8.0 kg	17.6 lb
Product Weight (Head Only)	3.12 kg	6.87 lb

Software Included HP Display Center

**What's in the box?** AC Power Cord (1.8m) 5.9 ft

HDMI Cable (1.8m) 5.9 ft DP Cable (1.8m) 5.9 ft

USB-B to A cable (1.8m) 5.9 ft

User Guide and Warranty Languages **User Guide Languages** English, Arabic, S. Chinese, T. Chinese, Czech, Danish,

Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.

Warranty Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish,

Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.



### **Technical Specifications**

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



## Summary

Change Log				
January 3, 2021	V1 to V2		Techspecs updated	
February 28,2021	V2 to V3		Energy Efficiency Class	
April 13, 2021	V3 to V4	Update	VESA Mounting Specs	
	V4 to V5			

